

DIMENSIONS

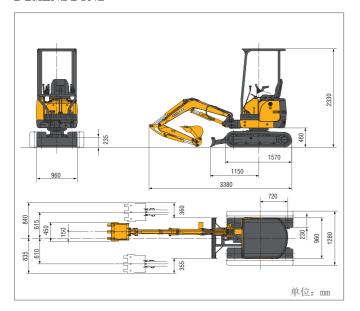

WORKING RANGE



SPECIFICATION

Performance	Parameter	
Model	18VX	
Operating weight	1775kg/1815kg	
STD. Bucket capacity	0.06m ³	
Engine		
Maker	YANMAR	
Model	YANMAR 3TNV70	
Rated output	15PS(11kW)/2300rpm	
Working Performance		
Swing speed	9.5rpm	
Travel speed	2.1/4.0km/h	
Gradeability	30°	

Performance	Parameter
Max. digging force	16.4kN
Hydra	ılic System
Pressure	20.6MPa. 18.1MPa.
Flow	17.2L/min×2+12L/min
Oil (Capacity
Fuel Tank Capacity	20L
Hydraulic oil Capacity	19L
Doze	er blade
Size	960/1280mm×235mm
Height	260mm/325mm

• This booklet is only for promotion, the pictures and contents may differ from the actual objects, and the actual objects shall prevail. The contents and specifications will be subject to change without prior notice.

7	
1	
1	
1	
1	
1	
1	
4	
E .	
~	



Address:No.39 Huanzhu Road, North Industrial Area, Jimei District, Xiamen Website: www.katosce.com





POWERFUL FUEL-EFFICIENT CONFIGURATION





The YANMAR engine features low fuel consumption, low noise and strong power.



Tri-pump system

Tri-pump full power control system ideally distribute and utilize the flow, improve and enhance the performance.


IN LINE WITH INTERNATIONAL STANDARS

THREE MAIN FUNCTIONS OF MINI-EXCAVATOR

Extendable undercarriage


This undercarriage design is efficient for transportation and traveling in confined spaces ensuring compactness and high stability.




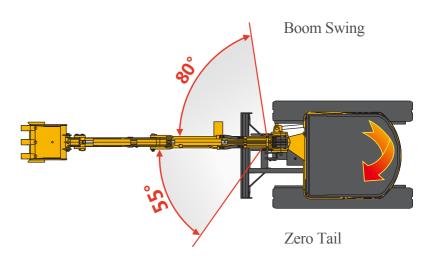

18VX

EASY MAINTENANCE, STRONG AND RELIABLE

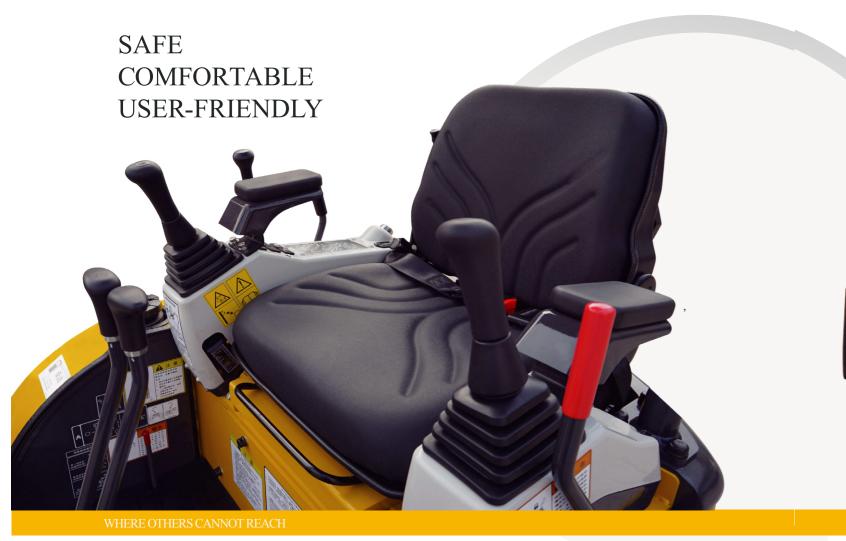



The fully openable engine cover provides great access to various components. Daily maintenance such as air filter cleaning, engine oil replacement become easier.

Removable side cover

Easy to clean radiator.

Fully versatile easy skimming work

The closer distance between bucket teeth and dozer blade allows it to skim the ground easier.



higher rigidity.

