



浙江吉鑫祥叉车制造有限公司
ZHEJIANG GOODSENSE FORKLIFT CO.,LTD



TB25 电动行李牵引车 Electric Baggage Tractor



TB25 电动行李牵引车关键零部件采用国内外知名品牌，具有性能优越、节能环保、造型美观、维修方便、工作效率高等特点，广泛应用于机场、邮政、铁路、食品、烟草、制造等行业。

TB25 Electric Tow Tractors are designed for airport, post office, railway station, and food industries. Reliable and excellent performance greatly increases the work efficiency, easy access to all major components largely reduces maintenance costs.

产品特点 Product Features

- 采用全液压转向，并配有钢板弹簧及减振器减振，操纵更加轻便灵活；
- 前后均配有牵引装置，可在驾驶室内操纵后牵引装置，方便高效；
- 遮阳顶棚式半封闭驾驶室，造型美观，视野宽阔，分色美观协调；
- 美国CURTIS电机控制器，控制精准高效，具有故障自我诊断等功能；
- 真空助力液压双回路四轮制动，具有极高的可靠性和安全性。
- Hydraulic steering system with shock absorption device, easy and flexible operation;
- Towing couplers both in front and rear, the rear couplers can be adjusted by the control lever in the cab;
- Semi-sealed cab with sunshade type provides a wide visual, harmonious color and beautiful outlook;
- American import CURTIS controller, precise control with self-diagnosis unction;
- Vacuum booster hydraulic dual re-circulation four wheel braking system, reliable and safe.

📍 地址：浙江省台州经济开发区滨海工业区海昌路1188号

☎ 电话：0576-82698896 📠 传真：0576-82698899

✉ 邮箱：market@goodsenseforklift.com

☎ 服务热线：400-8802020

📍 Add: Haichang Road 1188#, Binhai Industrial Zone Taizhou, Zhejiang, China

☎ Tel: 0086-576-82698897 📠 Fax: 0086-576-82707339

✉ E-mail: sales@goodsenseforklift.com

🌐 www.goodsenseforklift.com

TB25 Technical Parameter

特性		Characteristic		
1.01	型号	Model		TB25
1.02	动力形式	Power Type		蓄电池 Battery
1.03	额定牵引重量	Rated Traction Weight	kg	25000
1.04	自重	Service Weight	kg	4500
尺寸参数		Dimension Parameter		
2.01	总长	Overall Length	mm	3860
2.02	总宽	Overall Width	mm	1420
2.03	总高	Height	mm	1940
2.04	轴距	Wheelbase	mm	1610
2.05	前悬距	Front Overhang	mm	1225
2.06	轮距 (前/后)	Wheel Tread (F/R)	mm	1235/1185
2.07	牵引挂钩高度	Towing Couplers Height	mm	304.8
2.08	最小离地间隙	Ground Clearance	mm	110
2.09	最小转弯半径	Turning Radius	mm	3450
轮胎		Tire		
3.01	前轮	Front		6.50-10-10PR
3.02	后轮	Rear		7.00-12-12PR
性能参数		Performance Parameter		
4.01	行驶速度 (满载/空载)	Travel (Loaded/Unloaded)	km/h	10/20
4.02	前轴承载重量	Front Axle Load	kg	2000
4.03	后轴承载重量	Rear Axle Load	kg	2500
4.04	最大牵引力	Max Drawbar Pull	kN	22
4.05	额定牵引力	Rated Traction	kN	6
续驶里程		Mileage		
5.01	空载	Empty	h	12
5.02	15t负载 (不含板车)	15t Loaded	h	4
5.03	半程空半程负载 (15t不含板车)	15t Half load	h	6
电动机		Motor		
6.01	额定功率	Rated Power	kW	23
6.02	额定扭矩	Rated Torque	N·m	106.5
6.03	额定转速	Rated Speed	r.p.m	2063
6.04	额定电流	Rated Current	A	295
6.05	电机工作制	Motor Rating		S2 60min
蓄电池		Battery		
7.01	类型	Type		铅酸电池 Lead-acid Battery
7.02	电压/容量	Voltage/Capacity	V/Ah	80/660



- CAN通讯大屏幕LED仪表，显示信息量大，具有良好的电磁兼容及防水防尘特性；
- CAN, LED Meter, Integrated display, EMC and Water-dust prevention.






- 符合人机工程学设计与配置的操作界面，简洁明了，使操作更舒适、便捷、安全；
- Ergonomics operation interface, simple display, easy, safe and convenient operation.



- 点动开关具有微动调节功能，作业效率高；
- Micro-switch for micro adjustment with high efficiency.

单位: mm

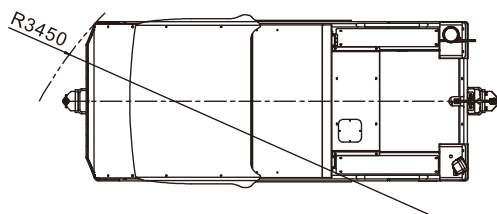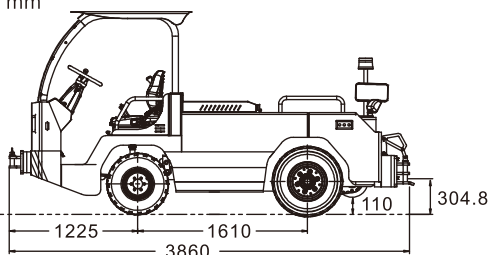

Vehicle Dimensions